


AIMB-215 B1

Intel® Celeron® Quad Core J1900/N2930/N2807 Mini-ITX with CRT/LVDS/DP++,
6 COM, and Dual LAN

NEW

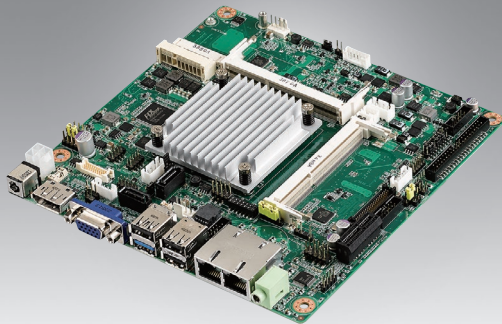

susIAccess

Specifications

Processor System	CPU (32nm)	Intel J1900	Intel N2930	Intel N2807
	Max. Speed	2.0 GHz (Quad core)	1.83 GHz (Quad core)	1.58 GHz (Dual core)
	L2 Cache	2 MB	2 MB	1 MB
	BIOS	AMI 16 Mbit SPI	AMI 16 Mbit SPI	AMI 16 Mbit SPI
Expansion Slot	PCI	-		
	Mini-PCIe	2 (F/S x 1 support mSATA, H/S x 1 with SIM card holder); H/S MiniPCIe colay PCIe x1		
	PCIe	PCI Express x1 (Gen2), colay H/S MiniPCIe		
Memory	Technology	Dual channel DDR3L 1066/1333 MHz SDRAM		
	Max. Capacity	8 GB/4 GB per SO-DIMM		
	Socket	2 x 204-pin SO-DIMM (Non-ECC)		
Graphics	Controller	Intel Gen 7 Graphics Engines and media encode/decode engine; GPU Frequency: 688 MHz for J1900; 313 MHz for N2930		
	VRAM	Shared system memory up to 224 MB SDRAM		
	VGA	Supports up to 2560 x 1600		
	LVDS	Supports dual channel 48-bit up to 1920 x 1200		
	Display Port 1.2	1, Supports DP++, resolution up to 2560 x 1600 colay eDP port (optional)		
	Dual Display	VGA+DP1.2, VGA+LVDS, LVDS+DP1.2, VGA+eDP (optional), LVDS+eDP (optional), Supports extended mode and clone mode		
Ethernet	Interface	10/100/1000 Mbps		
	Controller	GbE LAN1: Realtek 8111E GbE LAN2: Realtek 8111E		
	Connector	RJ-45 x 2		
SATA	Max Data Transfer Rate	300 MB/s		
	Channel	2, SATA 2 colay mSATA (optional); SATA 1 support SATA-DOM device		
Rear I/O	CRT	1		
	DP1.2	1		
	Ethernet	2		
	USB	4 (3 x USB 2.0/1 x USB 3.0)		
	Audio	1 (Mic-in or Line out)		
	DC jack	1 (2.5 mm)		
Internal Connector	LVDS & Inverter	1/1		
	eDP	1 (optional)		
	USB	4 (USB 2.0 compliant)		
	Serial	6 (5 x RS-232, 1 x RS-232/422/485; COM 3 support RS-232/422/485 auto flow control; COM 6 support 5V/12V by jumper selection)		
	IDE	None		
	SATA	2		
	SATA PWR Connector	2		
	Parallel	None		
	GPIO	8-bit		
	PS/2 KB & MS	1		
Watchdog Timer	Output	System reset		
	Interval	Programmable 1 ~ 255 sec/min		
Power	Power Type	Single voltage 12V DC input; 1 x External DC jack; 1 x Internal 4-pin (2x2) power connector; Supports AT/ATX mode		
	Typical Power Consumption	Win Idle 10.17 W (Intel Celeron J1900 2.0 GHz / DDR3L 1600 MHz 4GB x 2)		
Environment		Operating		
	Temperature	0 ~ 60° C (32 ~ 140° F) with 0.7m/s air flow		
Physical Characteristics		Non-Operating		
	Dimensions	-40 ~ 85° C (-40 ~ 185° F)		
		170 mm x 170 mm (6.69" x 6.69")		

Features

- Supports Intel Celeron Quad Core J1900/N2930/N2807 processor
- Two 204-pin SO-DIMM up to 8 GB DDR3L 1333 MHz SDRAM
- Supports VGA/DP1.2 /24-bit dual channel LVDS
- Supports 1 PCIe x1 and 2 mini-PCIe expansion slot, 6 COMs, 7 USB 2.0, and 1 USB 3.0
- Lower total cost of ownership with DC12V support and onboard TPM1.2(optional)
- Supports SUSIAccess and Embedded Software APIs


Software APIs:



Utilities:



Block Diagram

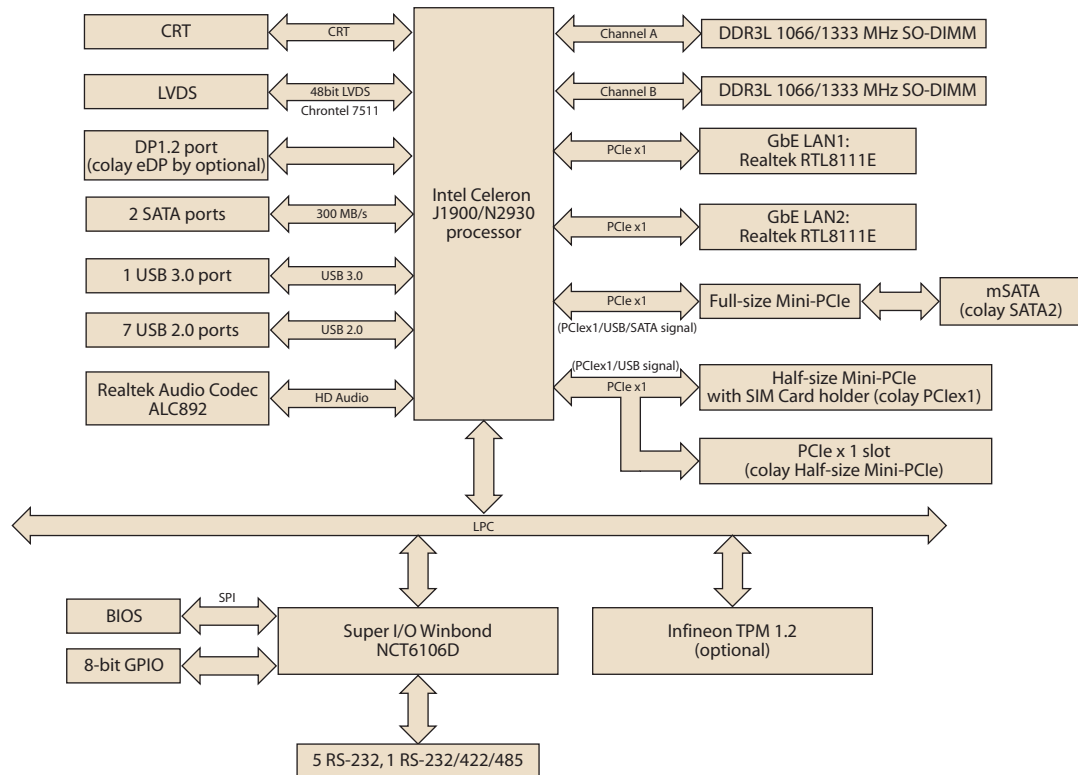

Ordering Information

Part Number	CPU	Memory	DP++/eDP	CRT	LVDS	GbE LAN	COM	SATA II	USB3.0/2.0	MiniPCle	TPM	AMP	PCIex1	Thermal Solution	Operating Temp.
AIMB-215D-S6B1E	J1900	2	1 (1)	1	1	2	6	2	1/7	2 (1 x F/S; 1 x H/S)	(1)	(2 x 6W)	1	Passive	0 ~ 60° C
AIMB-215N-S6B1E	N2930	2	1 (1)	1	1	2	6	2	1/7	2 (1 x F/S; 1 x H/S)	(1)	(2 x 6W)	1	Passive	0 ~ 60° C
AIMB-215U-S6B1E	N2807	1	1 (1)	1	0	1	2	1	1/3	1 x F/S	(1)	(2 x 6W)	1	Passive	0 ~ 60° C
AIMB-215L-S6B1E	J1900	2	1 (1)	1	0	1	2	1	1/3	1 x F/S	(1)	(2 x 6W)	1	Passive	0 ~ 60° C
AIMB-215DZ-S6B1E	J1900	2	1 (1)	1	1	2	6	2	1/7	2 (1 x F/S; 1 x H/S)	(1)	(2 x 6W)	1	Passive	-20 ~ 70° C

Note: Passive = fanless

* () BOM options available on MP version

Packing List

Part Number	Description	Quantity
1700003194	SATA HDD cable	1
1700018785	SATA power cable	1
1700008876	1-to-4 serial ports cable kit, 35 cm	1
1700100250	1-to-1 serial port cable, 25 cm	2
19Z0000569T000	I/O port bracket	1
2006021530	Startup manual	1
1960064228N001	Fanless heatsink	1

I/O View



Optional Accessories

Part Number	Description
1757003995	Adapter AC100-240V 60W +12V/5A
1757003064	Adaptor AC100-240V 84W, 12V/7A
1703060191	KBMS cable 1*6P-2.5/DIN-6P(F)*2, 25 cm
1700023474-01	A Cable USB-A 4P(F)*2/2*5P-2.0 34.5CM F/10

Optional Chassis

Part Number	Description
AIMB-B2000-00YE	Mini-ITX chassis with optional DC Adaptor

Embedded OS/API

OS/API	Part No.	Description
WES8	TBD	Windows Embedded 8
WES7	TBD	Windows Embedded 7