


EZN468MS


4-Megapixel IR, Motorized,
Outdoor Stainless Steel Bullet
Network Camera

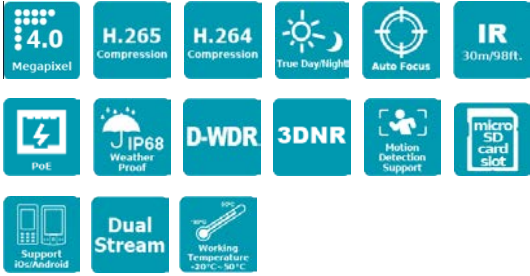

Features

- 4M CMOS sensor
- Marine Grade Stainless Steel (AISI 316) can withstand harsh and corrosive environment
- Motorized 2.8-12mm lens to capture desired field of view
- Provides Digital Wide Dynamic Range function
- Provides True Day/Night with automatic IR filter operation
- Extended IR range of up to 30m / 98ft. with 3 high power IR LEDs (Depending on the IR reflectivity in the actual scene)
- Supports dual streams of H.265 and H.264
- Supports Motion Detection and Email Notification
- Equipped with weather proof (IP68) and vandal resistance (IK10) housing
- Supports live video monitoring from mobile devices via MobileFocus App (iOS and Android)
- Supports Power over Ethernet / 12VDC
- ONVIF profile S compliant
- Supports Micro SD card (up to 128GB)

Dimensions

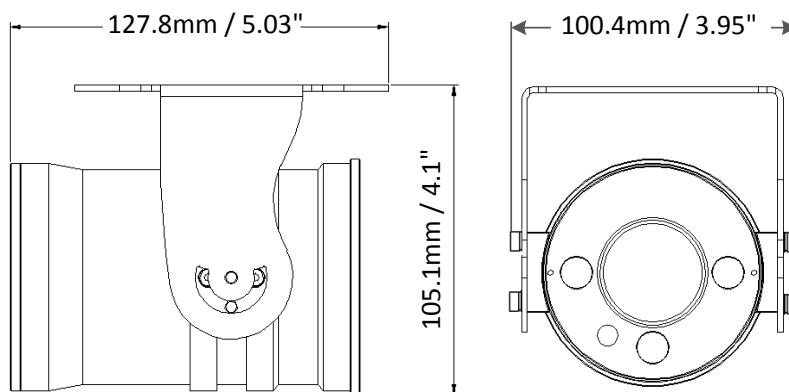

*All images presented in this document are for example only. Product models may vary in different countries. Please visit EverFocus regional Websites for detailed ordering information.

*Information contained in this document is subject to change without notice.

Optional Accessories

IP Sidekick

IP Sidekick - ESK1000



Using it for installation, you do not need to pre-configure the IP address or to use an additional monitor to check and adjust all the IP cameras. The product can assign an IP address to the camera, and then you can connect and check the IP camera live view using our mobile app EF Sidekick. For details about IP Sidekick, please refer to the IP Sidekick – ESK1000 User's Manual.

PoE Switch

EverFocus 5 / 8 / 16 / 24 Ports PoE Switch



5 Ports: ES0501-40

16 Ports: ES1625-31 / ES1645-51

8 Ports: ES0812-31 / ES0802-41

24 Ports: ES2426-31 / ES2446-51 / ES2448-62

Sunshield



Stainless Steel Sunshield can protect the camera from the direct rays of sun.

Specification

Model No.	EZN468MS		
Pickup Device	4M CMOS sensor	Image Settings	Contrast, Brightness, Saturation, Sharpness, Mirroring of Images
Lens	Motorized 2.8-12mm lens	Intelligent Alarm	Video Loss, Network Anomaly, Tampering Alarm, Storage Exception, Motion Detection
Minimum Illumination	Color: 0.5Lux @F1.4 B/W: 0.2Lux @F1.4	Event Trigger	Motion Detection, Tampering Detection
Day/Night	True Day/Night with ICR	Notification	Email Notification, Live View Window Notification, Push Notification (via MobileFocus App)
Iris	Fixed Iris	Password Protection	Supported
Electronic Shutter	Auto / Manual (1/25 ~ 1/10,000) / Flickerless	Storage	Micro SD / SDHC / SDXC slot (Max. 128G, up to class 10)
Video Compression	H.265 / H.264	IR LED	3 Units (High Power)
Max. Video Resolution	2592 x 1520	IR Distance	30m / 98ft.
Frame Rate	25fps(Pal) / 30fps(NTSC)	Power Supply	12VDC
S/N Ratio	≥ 35db (AGC OFF)	Power over Ethernet	PoE IEEE802.3af (Class 3)
AGC	Yes	Max. Power Consumption	12VDC 7.4W / PoE 8.2W
AWB	Yes	Humidity	0% ~ 90% not condensing
D-WDR	Yes	Operating Temp.	-20°C ~ 50°C / -4°F ~ 122°F
3DNR	Yes	Dimensions	127.8 x 105.1mm / 5.03" x 4.14"
Interface	RJ-45 10M/100M adaptive	Weather Resistance	IP68
Supported Protocols	TCP/IP, UDP, HTTP, DHCP, RTSP, DDNS, NTP, PPPOE, UPNP, SMTP, ONVIF	Vandal Resistance	IK10
Reset Button	Yes	Weight	1660g / 3.66lb
Stream Type	Complex stream / Video stream	Certificates	CE, FCC, RoHS

Find Out More At:

EverFocus Taiwan HQ:
TEL: +886 2 2698 2334
www.everfocus.com.tw
marketing@everfocus.com.tw

EverFocus USA - California:
TEL: +1 626 844 8888
www.everfocus.com
sales@everfocus.com

International Branch Offices:
Germany, China, Japan